

AL20NIE

Portable Presses



Top safety for the operator

Safety rails connect the bars from the center and ensure the consistency of the whole structure. Security pin locks for the bolts avoid unexpected accidents.



Easy handling and versatility

The press can be splitted into light pieces for an easy operation.




Material	• Aluminium
Control box	<ul style="list-style-type: none"> • Automatic process • Dwell time • Digital temperature displays • Digital Timer • Buzzer alarm for end of process
Pressure	<ul style="list-style-type: none"> • Filled with air/water • K7: Max. o.p. 7Kg/cm² (100PSI) • K14: Max. o. p. 14Kg/cm² (200PSI)
Heating	• Max. T. 185°C (365°F)
Cooling	• Water
Belt width	• Up to 3200mm (126")
Platen angle	• 16°, 22° & 90°
Options	
I.-	Pressurized water tank (MDY)

Platen options

- Modular

Different configurations of the plates depending on customer's specifications. Fill the heating area with only one heating plate or several units, using these ones for smaller belt widths, acquiring only bars/traverses for these dimensions.

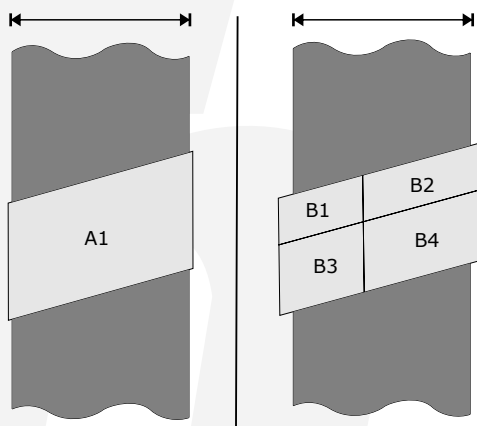

- Multiangular

Possibility of bias angle and/or straight angle splices with the same set of platens.

